

# Taş Ayırıcı Dry Stoner Треугольный Камнеотборник



## “Precise Separation for Pure and Safe Grain”

The Dry Stoner is specially designed to separate stones, glass, and other heavy foreign materials from wheat and various grains. Using a combination of air flow and vibration, it ensures precise separation based on density differences, improving the purity and safety of the final product.



**High Performance**  
Высокая  
производительность



**Less Energy**  
Меньше  
Энергии






**Maximum Capacity**  
Максимальная  
емкость



With its optimized air distribution system and adjustable settings, the Dry Stoner provides stable performance across different grain types and contamination levels. Its energy-efficient design minimizes power consumption while maintaining a high separation capacity.

Manufactured from high-quality, wear- and corrosion-resistant materials, the Dry Stoner is built for long-lasting operation in demanding industrial environments. Its accessible design allows for quick cleaning, adjustment, and maintenance, reducing downtime and ensuring continuous, reliable performance.

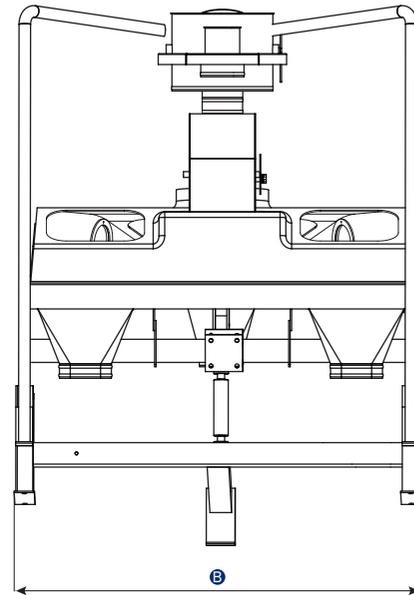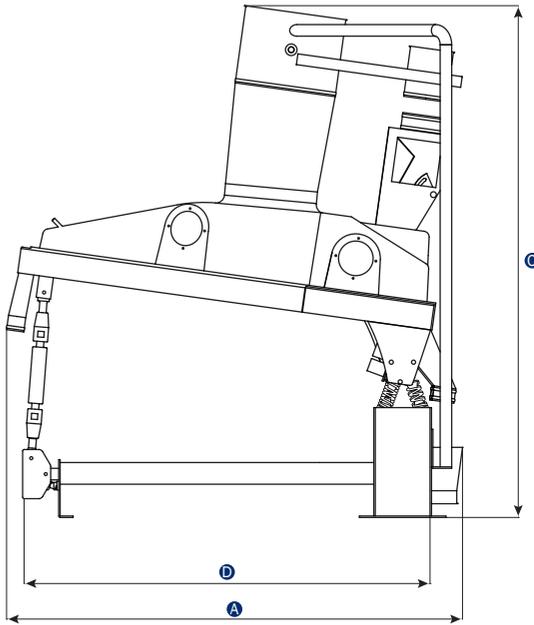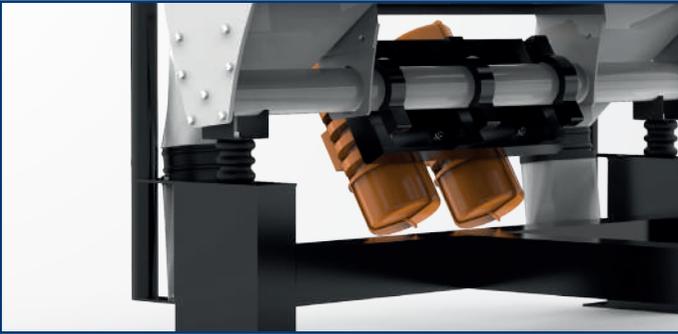

Type Model	Motor Power Motor (kW)	Kasa Ölçüleri (mm) Sieve Dimensions	A	B	C	D	Weight Ağırlık
KRM-TA 100	2x0.35 (vibro)	600x1200	1520	1400	1750	1290	285
KRM-TA 100	2x0.35 (vibro)	1100x1410	1520	1400	1750	1290	285