

Pnömatik Yön Klape

Pneumatic Diverter Gate

Пневматическая Направляющая Заслонка



"Smart Flow Control for Flexible Production"

The Pneumatic Diverter Gate is designed to direct bulk materials quickly and accurately between different conveying lines. Operated by a pneumatic actuator, it allows seamless switching between product routes without interrupting the production flow, ensuring high operational flexibility.




High Performance
Высокая
производительность



Less Energy
Меньше
Энергии



Maximum Capacity
Максимальная
емкость

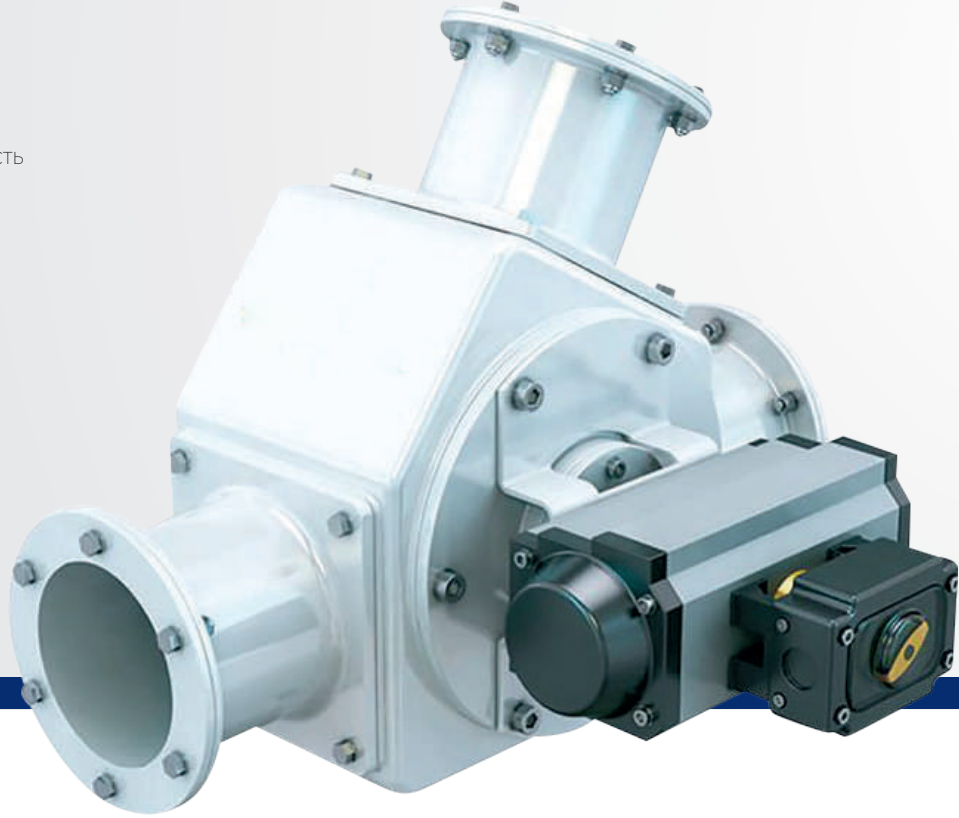

Type Model	KRM-PDG 80	KRM-PDG 100	KRM-PDG 120	KRM-PDG 150	KRM-PDG 180
Ağırlık (Brüt)	70 KG	92 KG	132 KG	172 KG	212 KG
Toplam Uzunluk	484 mm	516 mm	548 mm	598 mm	636 mm
Teknik Özellikler	Brüt Hacim 0,1 m³	Brüt Hacim 0,12 m³	Brüt Hacim 0,14 m³	Brüt Hacim 0,18 m³	Brüt Hacim 0,22 m³
	Piston 24 volt	Piston 24 volt	Piston 24 volt	Piston 24 volt	Piston 24 volt
Voltaj Frekans	380 volt 50 hertz	380 volt 50 hertz	380 volt 50 hertz	380 volt 50 hertz	380 volt 50 hertz
Ekipman	Karbon Çelik ST37	Karbon Çelik ST37	Karbon Çelik ST37	Karbon Çelik ST37	Karbon Çelik ST37
Yüzey	Boyalı	Boyalı	Boyalı	Boyalı	Boyalı