

Pelet Soğutucu Pellet Cooler Охладитель



“Efficient Cooling for Superior Pellet Quality”

Our pellet coolers are designed to ensure optimal cooling performance, preserving the structure and nutritional value of the pellets after the pelleting process. With a high-capacity and energy-efficient design, they provide uniform cooling that minimizes moisture, prevents breakage, and improves overall feed quality.



High Performance

Высокая
производительность



Less Energy

Меньше
Энергии



Maximum Capacity



Максимальная
емкость



KM KAR-MILL
MACHINERY INDUSTRY

Featuring advanced airflow technology and optimized cooling surfaces, our coolers achieve maximum cooling efficiency with minimal energy consumption. The intelligent design minimizes operational costs while ensuring high-capacity performance, making it ideal for intensive, continuous production lines. This balance between performance and efficiency supports sustainable production without compromising on output quality.

Constructed from high-quality, wear-resistant materials, the pellet cooler is designed for long-term durability under demanding operating conditions. Its robust structure and low-maintenance components ensure consistent performance and minimal downtime. Whether used in small or large-scale feed plants, it delivers reliable cooling performance that supports stable and efficient production processes.

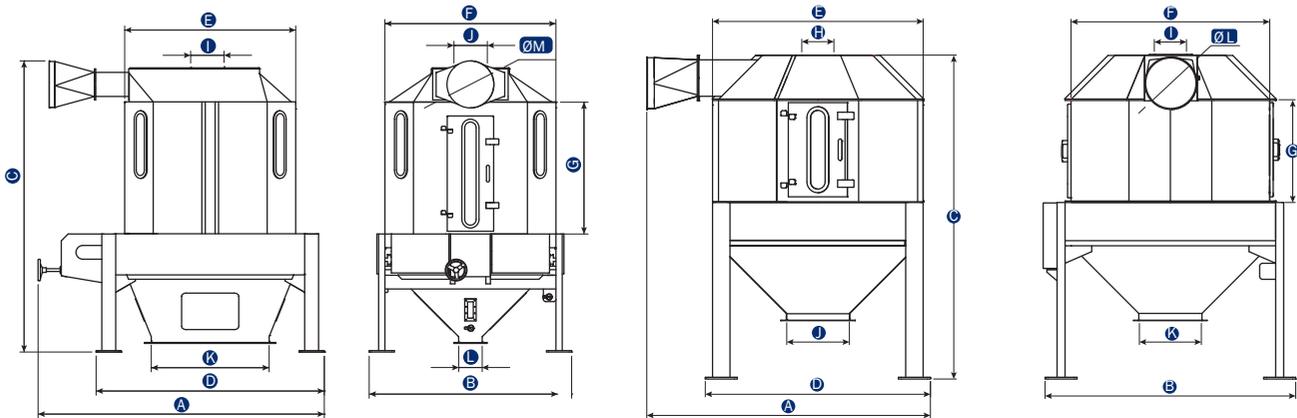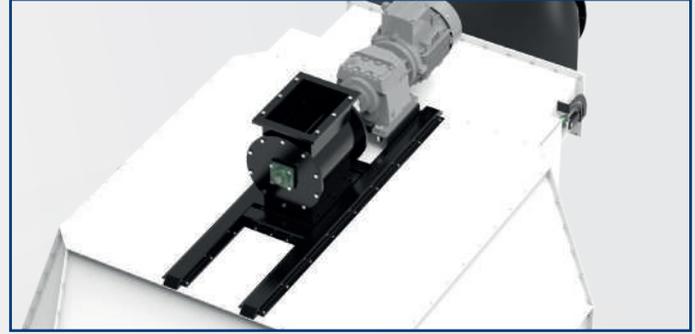

| Type Model | A | B | C | D | E | F | G | H | I | J | K | L | ØM | Weight (Kg) Ağırlık |
|---------------------|------|------|------|------|------|------|------|------|-----|-----|------|------|-----|------------------------|
| KRM-PC 1360x1360 | 1895 | 1725 | 2220 | 1550 | | | 700 | 225 | 225 | 430 | 425 | 345 | - | 670 |
| KRM-PC 1400x1400 | 2505 | 1770 | 2745 | 1995 | 1445 | 1445 | 1150 | - | 220 | 220 | 1025 | 200 | 500 | 1130 |
| KRM-PC 1400x1400 | 2555 | | 3640 | | | | 700 | 900 | | | | | | 1900 |
| KRM-PC 1900x1900 | 3000 | 2270 | 3320 | 2495 | 1915 | 1915 | 1400 | - | 300 | 300 | 1275 | 250 | 650 | 1660 |
| KRM-PC 1900x1900 | 3050 | | 4270 | | | | 800 | 1100 | | | | | | 2720 |
| KRM-PC 2250x2250 | 3395 | 2620 | 3540 | 2845 | 2265 | 2265 | 1400 | - | 400 | 400 | 1525 | 1010 | 800 | 2050 |
| KRM-PC 2250x2250 | 3375 | | 4985 | | | | 1000 | 1400 | | | | | | 3435 |
| KRM-PC 3000x3000 | 4090 | 3600 | 4340 | 3375 | 3020 | 3020 | 1600 | | | | | | 900 | 3130 |